


MAST GATER INSTALLATION INSTRUCTIONS

1. Measure the slot in the mast, the largest part.
2. File or sand the gate to this length. Measure from point A to C and from point B to D, keeping these two measurements as equal as possible to get the overall length of C to D.
3. File or sand both ends of D and C to match the slot in the mast. Do this slowly checking often. Mark each gate, one port, the other starboard.
4. After you have the ends of the gate filed close to what you want, you can bend the ends to match the mast.
5. Once the gates are where you want them, have someone hold the gates in place so they do not move. Use a center punch to mark the exact location of the holes. Then drill the four holes using a #25 drill bit and tap the holes with a 10X24 tap.
6. If you should find the slot is too tight for the slugs after the gates are installed, file the length of the gates from C to D and reinstall.

Your cancelled check is your receipt

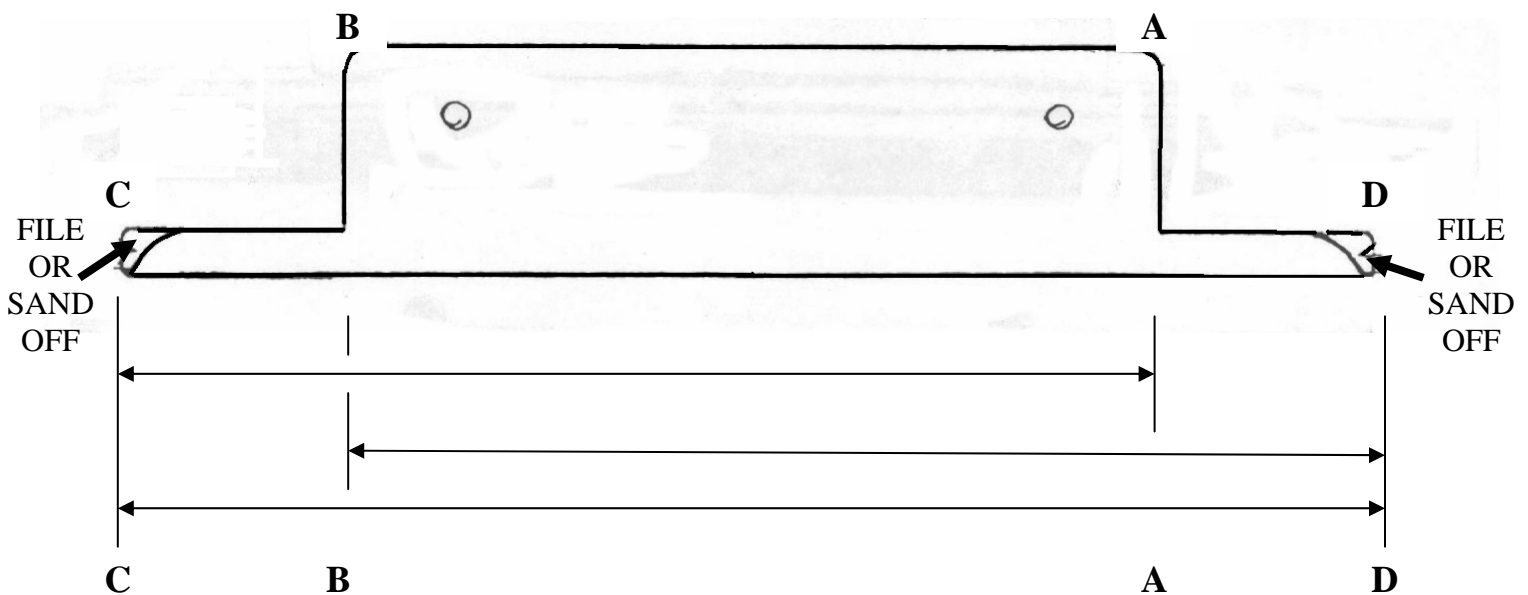

*Joseph R. Martinek
P.O. Box 615
San Luis, Co 81152-0615*


joemartinek@starband.net

Alternate Mounting Instructions

Square off the slot in the mast, then continue as per *Mast Gater Installation Instructions*

Original round corner could be filed square to accept mast gater...

Round off the sharp edges...

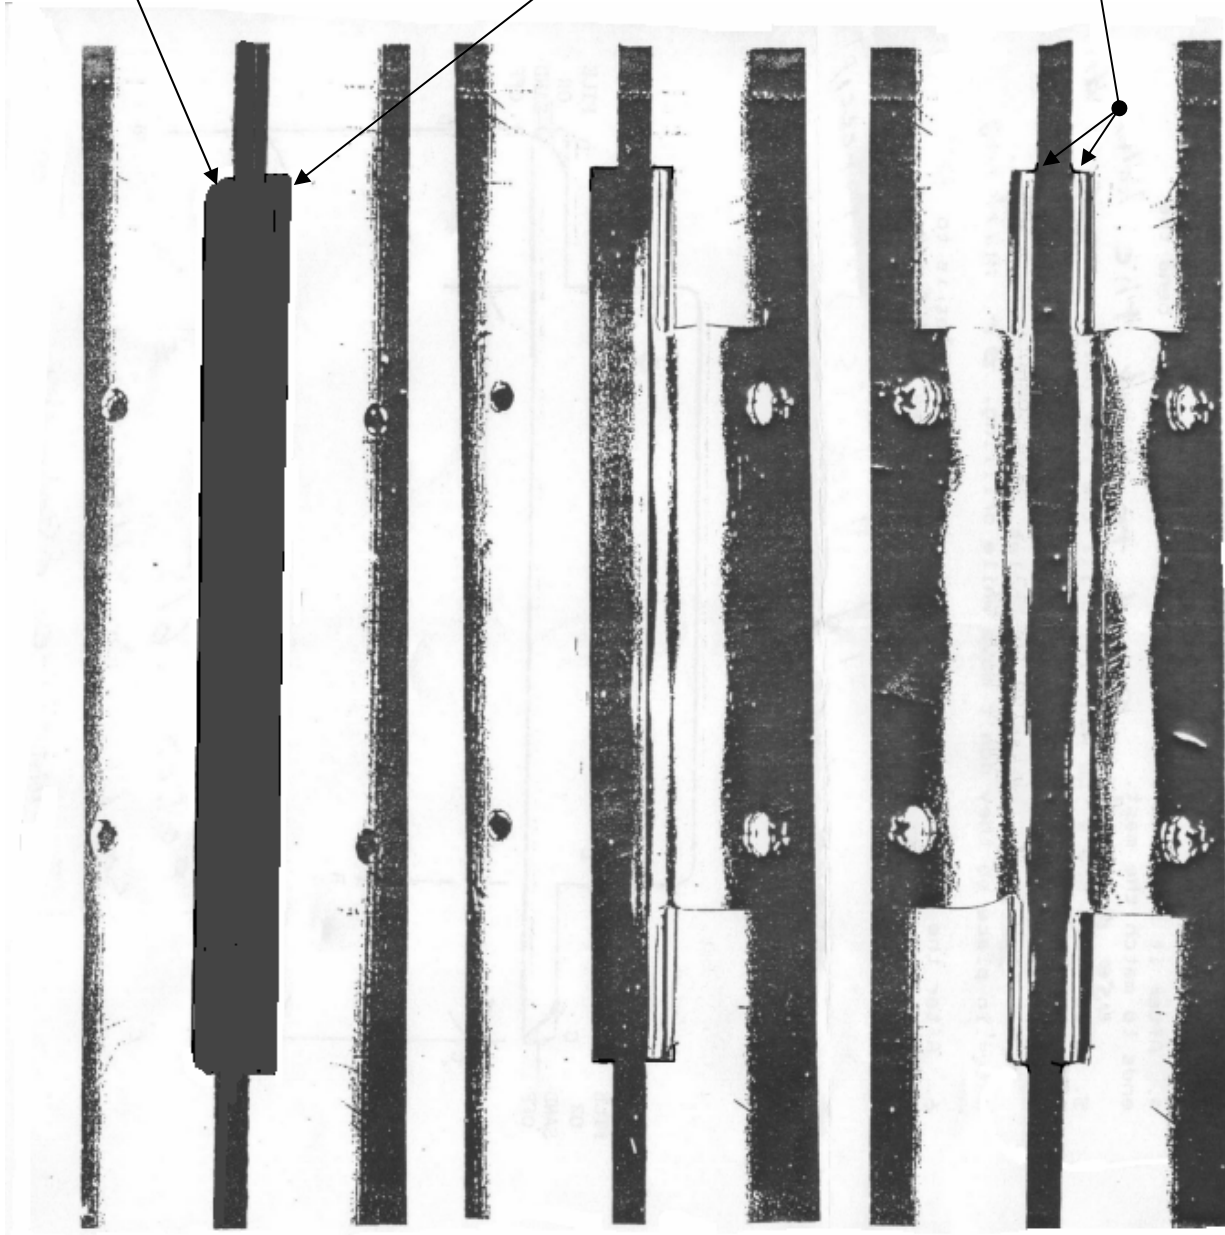

Joseph R. Martinek
P. O. Box 615
San Luis, Co. 81152-0615

joemartinek@starband.net